


SANYO

Cadnica

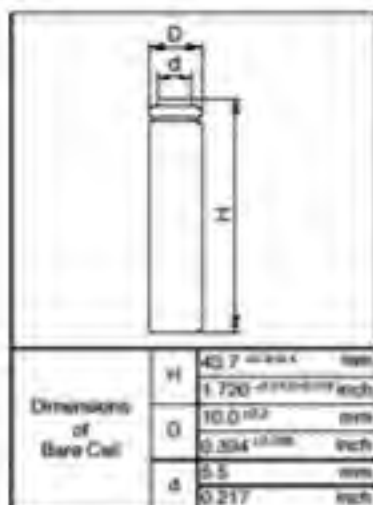


Cell Type N-250AAAC

Specifications


Nominal Capacity		250mAh	
Nominal Voltage		1.2V	
Charging Current	Standard	25mA	
	Quick	75mA	
	Fast	375mA	
Charging Time	Standard	14 to 16Hrs.	
	Quick	4 to 6Hrs.	
	Fast	about 1Hr	
Ambient Temperature	Charge	Standard	0°C to +45°C +32°F to 113°F
		Quick	10°C to +45°C +50°F to 113°F
		Fast	0°C to +45°C +32°F to 113°F
	Discharge		-20°C to +60°C -4°F to 140°F
	Storage		-30°C to +50°C -22°F to 122°F
Internal Impedance (Av.) (at 50% discharge)		24.0mΩ (at 1000Hz)	
Weight		11g/0.39oz	
Dimensions(D)×(H) (with tube)		10.5 _{+0.4} ⁰ × 44.4 _{+0.3} ⁰	mm
		0.41 _{+0.02} ⁰ × 1.75 _{+0.04} ⁰	inch

Typical Characteristics


Charge

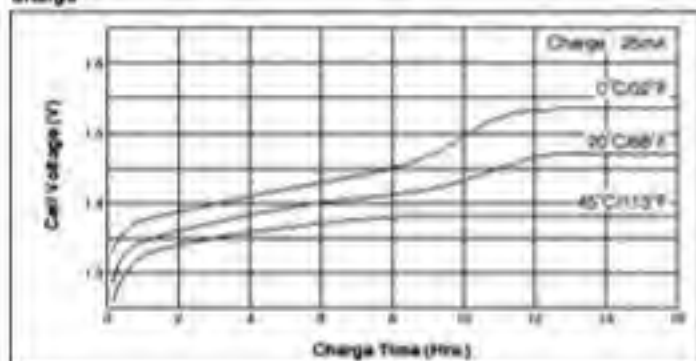


Discharge (at high rate)

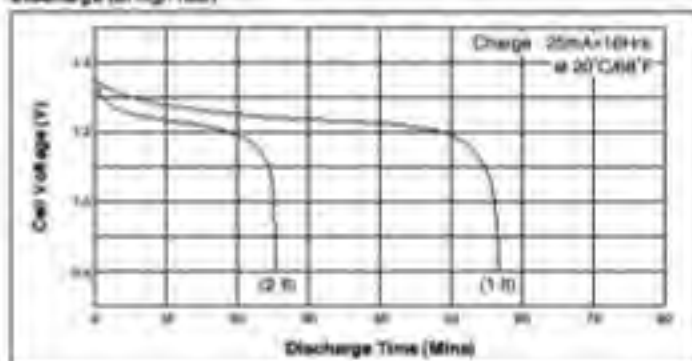


Charge

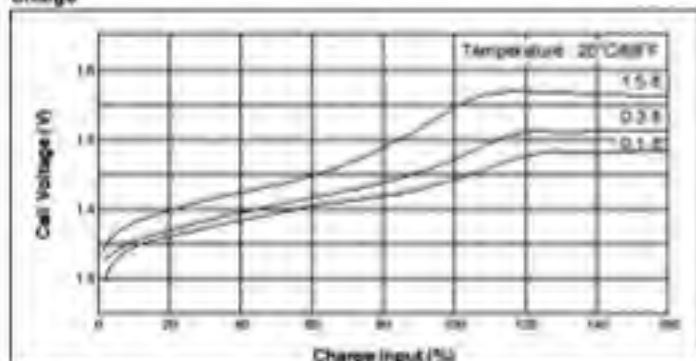

Discharge (at high rate)

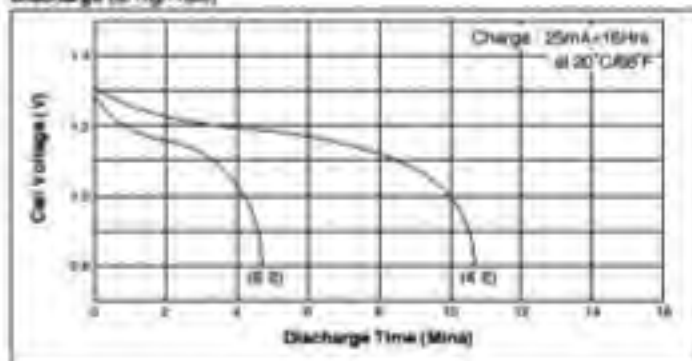

Discharge (at low rate)

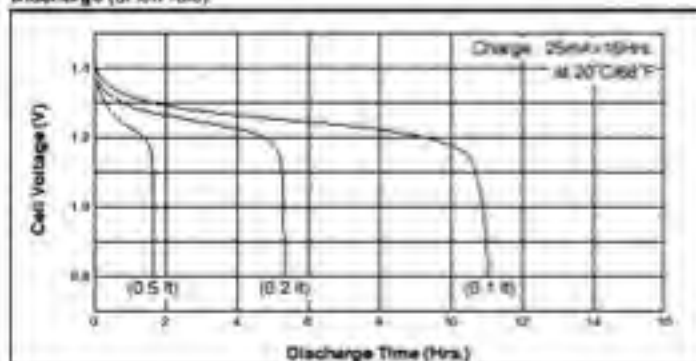

Temperature (Charge & Discharge)

